

Web-Based Information Systems

Winter 2002

CMPUT 499: JavaScript

Dr. Osmar R. Zaiane



University of Alberta

Course Content

- | | |
|--|--|
| <ul style="list-style-type: none">• Introduction• Internet and WWW• Protocols• HTML and beyond• Animation & WWW• Java Script• Dynamic Pages• Perl• Java Applets | <ul style="list-style-type: none">• Databases & WWW• SGML / XML• Managing servers• Search Engines• Web Mining• CORBA• Security Issues• Selected Topics• Projects |
|--|--|



I. JavaScript and the Details



Objectives: Learn how JavaScript stores data, how a document is structured in JavaScript, learn event-based programming with JavaScript.



Content

- Variable identifiers and their types
- The notion of objects
- Arrays
- Control structures
 - Condition and selection
 - Iteration
- Procedures and functions

Introduction to Variables

- A variable in Javascript has a type:
 - number (integer or non integer)
 - String
 - Boolean
 - Null
- JavaScript is not strongly typed.

Declaring Variables

The first time a variable is used it must be declared with the keyword **'var'**.

```
var identifier = value;
```

The identifier must start with a letter or underscore **'_'** and can have as many characters as necessary (letters, digits, underscore).

JavaScript is sensitive to capital letters.
myvariable is different from *MyVariable* and $x \neq X$

Type Conversion on the fly

- Because JavaScript is not strongly typed, it is possible to:
 - Change the type of a variable;
 - Do operations on variables of different types.
 - The major type, or default type, is string.

Variable Examples

```
<HTML>
<HEAD>
<TITLE>Mon premier JavaScript avec variables</TITLE>
<script language="JavaScript">
  <!-- hide script
    var monNombre=35;
    var maChaine="2000";
    var monAutreChaine="CMPUT499";
    var monAddition = monNombre+monNombre;
    var maConcatenation = maChaine + monAutreChaine;
    var monErreur = monNombre + monAutreChaine;
    var monCalcul = monNombre + maChaine;
    var monReve = monAutreChaine + maChaine;
  // end of hide -->
</script>
</HEAD>
```

Variable Examples (con't)

```
<BODY>
<script language="JavaScript">
  <!-- hide script
    document.write("monAddition="+monAddition+"<BR>");
    document.write("maConcatenation="+maConcatenation+"<BR>");
    document.write("monErreur="+monErreur+"<BR>");
    document.write("monReve="+monReve+"<BR>");
    monErreur = monNombre * 3;
    document.write("monErreur="+monErreur+"<BR>");
    monNombre="Salut";
    document.write("monNombre="+monNombre+"<BR>");
  // end of hide -->
</script>
</BODY>
</HTML>
```

```
monAddition=70
maConcatenation=2000TICE
monErreur=35CMPUT499
monReve= CMPUT4992000
monErreur=105
monNombre=Salut
```

I. JavaScript and the Details



Objectives: Learn how JavaScript stores data, how a document is structured in JavaScript, learn event-based programming with JavaScript.



- Variable identifiers and their types
- The notion of objets
- Arrays
- Control structures
 - Condition and selection
 - Iteration
- Procedures and functions

Content

JavaScript & Concept of Objects


- JavaScript is not an object-oriented language.
- JavaScript is an object-based language.
- There are many pre-defined objects, but programmers can define their own objects.
- An object has attributes (specific properties) as well as methods (behaviour of objects).
- An attribute could be a value or recursively another object.

A Book is an Object



Title
Authors
Editors
Number of pages
Price
Set of Chapters
Set of figures and images
etc.

Each book has the same attributes with different values



What are the Objects, What are their Properties?



?

Access Object Properties


myObject.oneProperty

Object Name . Attribute Name

If the attribute is also an object, to access the property of the attribute's attribute:

myObject.oneProperty.aPropertyOfProperty

Ex: Book.Editor.Address



document.MyForm.Name.value

Access Object Methods

myObject.oneMethod(parameters)

Object Name . Method Name (parameters)

If there are no parameters:

myObject.oneMethod()

Ex: document.write("Hello!")

Predefined Object Classes

- There are many intrinsic pre-defined objects in JavaScript:

-Date	-Navigator
-String	-History
-Math	-Location
-Window	-Form
-Document	etc...

- These objects have their pre-defined attributes and methods.

Object Date

- The object Date needs to be instantiated with the keyword *new*.
var today= new date();
- The class Date doesn't have properties but the following methods:

•getDate()	•getYear()
•getDay()	•setDate()
•getHours()	•setHours()
•getMinutes()	•setMinutes()
•getMonth()	•setMonth()
•getSeconds()	•getSeconds()
•getTime();	•setTime();
•getTimezoneOffset()	•setYear()

etc...

Example with Date

```
<HTML>
<HEAD>
<TITLE>Mon essai avec les dates</TITLE><script language="JavaScript">
  var maintenant=new Date();
  var dateNaissance = new Date(60,05,18);
</script></HEAD>
<BODY> <script language="JavaScript">
  document.write("Aujourd'hui nous sommes le:"+maintenant+"<BR>");
  document.write("La date de naissance de toto est le="+dateNaissance+"<BR>");
  document.write("la Date:"+dateNaissance.getDate()+ "/" +
    (dateNaissance.getMonth()+1) + "/" +
    (dateNaissance.getYear()+1900)+"<BR>");
  document.write("Il est maintenant:" + maintenant.getHours() + ":" +
    maintenant.getMinutes() + ":" +
    maintenant.getSeconds()+"<BR>");
  maintenant.setYear(2010);
  document.write("On s'est transporté au futur. La nouvelle date est:<br>" + maintenant);
</script></BODY></HTML>
```

The Object String

- Where we define a string constant or a string variable, JavaScript creates an instance of an object String.
- The object String has one property, *length*, and many methods:

•anchor()	astring.anchor(anchor)→astring
•big()	astring.big()→<BIG>astring</BIG>
•blink()	astring.blink()→<BLINK>astring</BLINK>
•bold()	astring.bold()→<BOLD>astring</BOLD>
•fontcolor()	astring.fontcolor(#FF0000)→astring
•fontsize()	astring.fontSize(5)→astring
•italics()	astring.italics() →<I>astring</I>
•small()	astring.small()→<SMALL>astring</SMALL>
•sub()	astring.sub() →_{astring}
•sup()	astring.sup() →^{astring}

The Object String (con't)

- Other methods for the String object:

•link()	
•toUpperCase()	astring.toUpperCase() converts into uppercase
•toLowerCase()	astring.toLowerCase() converts into lowercase
•substring()	astring.substring(3,5) substring from 3 rd character to 5 th .
•indexOf()	astring.indexOf(anOther) returns the position of anOther in astring.
•charAt()	astring.charAt(4) returns the 4 th character.

The index in a string starts at 0.

Example with String Object

```
<HTML>
<HEAD>
<TITLE>Mon essai avec les chaines</TITLE>
<script language="JavaScript">
  var maChaine=prompt("Donnez moi une phrase","Je suis alle a l'ecole");
</script>
</HEAD><BODY>
<script language="JavaScript">
  document.write(maChaine+"<BR>");
  document.write(maChaine.bold()+"<BR>");
  document.write(maChaine.italics()+"<BR>");
  document.write(maChaine.fontcolor("red").blink()+"<BR>");
  document.write(maChaine.link("http://www.cnn.com")+"<BR>");
  document.write(maChaine+"<BR>");
</script>
</BODY></HTML>
```

The Object Math

- The class Math contains common constants such as: **Math.PI** and **Math.E** which respectively return **3.1415926535897931** and **2.7182818284590451**
- Some useful methods:

•abs()	•log()
•acos()	•max()
•cos()	•min()
•asin()	•pow()
•sin()	•random()
•atan()	•round()
•tan();	•sqrt();
•exp()	•floor()

The Object Window

- JavaScript provides by default an object *window* representing the current window. This object is the root of the hierarchy describing the JavaScript objects.
- This object has many properties:

•defaultStatus	default message displayed on the status bar
•frames	set of frames displayed by the browser
•length	number of frames present in the parent window
•name	name of the window
•parent	parent window
•self	active window
•status	message displayed on the status bar
•top	top of the object hierarchy defined by the browser
•window	active window

Methods of the Window Object

- alert() (modal) window to display a message.
- confirm() (modal) window for selection.
- prompt() (modal) window to enter a value.
- clear() clears the window content.
- open() opens a new window.
- close() closes the current window.

To open a window:

```
window.open("URL","NameOfWindow","options");
```

Options are:

•menubar	•resizable	•toolbar
•status	•width	•location
•scrollbars	•height	•directories

Example with Windows

```
<HTML>
<HEAD>
<TITLE>Mon essai avec les fenetres</TITLE>
</HEAD>
<BODY>
<A HREF="#" onMouseOver="window.status='bonjour!';return true;">Salut</A>
<BR>
<A HREF="test.html" TARGET="nouvelle">Ouvre moi</A>
<BR>
</BODY>
</HTML>
```

Opening a Window

```
<HTML>
<HEAD>
<TITLE>Mon autre essai avec les fenetres</TITLE>
</HEAD>
<BODY>
<a href="#" onClick="maFenetre=window.open(
    'test.html','monTest','width=100,height=200,scrollbars,resizable');
    return true;">Ouvre moi</a><br>
<a href="#" onClick="maFenetre.focus();return true;">Montre moi</a><br>
<a href="#" onClick="maFenetre.blur();">Cache moi </a><br>
<a href="#" onClick="maFenetre.close();return true;">Ferme moi</a><br>
</BODY>
</HTML>
```

Example with Window Options

```
<HTML>
<HEAD>
<TITLE>Encore un essai avec les fenetres</TITLE>
</HEAD>
<BODY>
menubar,status,scrollbars,resizable,location,directories,width,height
<BR>
<a href="#" onClick="option=prompt('Quelles sont les options:');
    maFenetre=window.open('','monTest',option);
    return true;">Ouvre moi</a>


<BR>
<a href="#" onClick="maFenetre.close();
    return true;">Ferme moi</a>

<BR>
</BODY>
</HTML>
```

Document Object Model (DOM)

- Now that we know what a JavaScript object is and we know how to open a window, it is time to learn about the document object model.
- JavaScript includes predefined objects such as *window*. These objects have predefined properties and methods.
- An object property can also be an object.

Objet Hierarchy

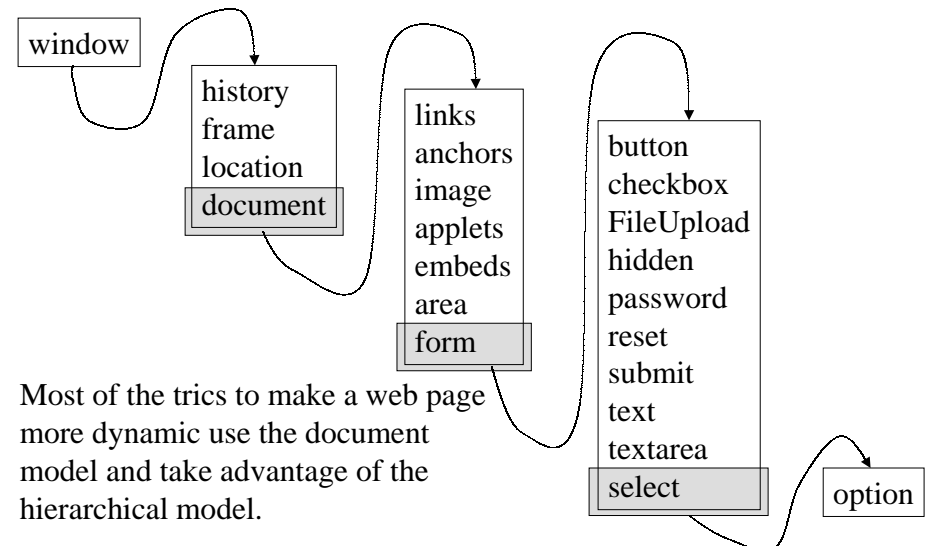

Most of the tricks to make a web page more dynamic use the document model and take advantage of the hierarchical model.


Other Examples of Predefined Objects

- History contains the list of all visited URL during the current session.

```
<HTML>
<HEAD><TITLE>essai avec l'historique</TITLE></HEAD>
<BODY>
<SCRIPT LANGUAGE="JavaScript">
  document.write("Nombre d'URL="+window.history.length);
</SCRIPT><FORM>
<INPUT TYPE=button VALUE="Back"
  onClick="window.history.back();return true;">
<INPUT TYPE=button VALUE="Retour 3 pages"
  onClick="window.history.go(-3);return true;">
</FORM>
</BODY></HTML>
```

The Frames

- The important thing about frames, is that each frame inside a window is also considered a window.
- This implies nested window.
- Thus, there is a window on top including all the others called *top*, and each window has a parent called *parent*. To reference the current window, we use *self* (interchangeable with *window*).



JavaScript and Frames

```
<HTML><HEAD><TITLE>essai avec les cadres</TITLE>
<SCRIPT LANGUAGE="JavaScript">
var FrameVide = '<html><body bgcolor="#FFFFFF"></body></html>';
</SCRIPT>
</HEAD>
<FRAMESET rows="25%,*">
<FRAME SRC="EX16.HTM" name="controle">
<FRAME SRC="javascript:parent.FrameVide" name="cadre_cible">
</FRAMESET>
</HTML>
```

EX16.HTM

```
<HTML>
<HEAD><TITLE>cadre de controle</TITLE></HEAD>
<BODY>
<a href="#" onClick="top.cadre_cible.document.writeln('Bonjour!<br>');">Bonjour!</a>
<BR><a href="#" onClick="top.cadre_cible.document.writeln('Salut!<br>');">Salut!</a>
</BODY></HTML>
```

JavaScript and Frames (con't)

```
<HTML><HEAD><TITLE>encore un essai avec les cadres</TITLE>
<SCRIPT LANGUAGE="JavaScript">
var FrameVide = '<html><body bgcolor="#FFFFFF"></body></html>';
</SCRIPT>
</HEAD>
<FRAMESET rows="25%,*">
<FRAME SRC="EX16b.HTM" name="controle">
<FRAME SRC="javascript:parent.FrameVide" name="cadre_cible">
</FRAMESET>
</HTML>
```

EX16b.HTM

```
<HTML>
<HEAD><TITLE>cadre de controle</TITLE></HEAD>
<BODY>
<a href="#" onClick="top.cadre_cible. document.bgColor=#00FF00;">Vert</a>
<BR><a href="#" onClick="top.cadre_cible. document.bgColor='yellow';">Jaune</a>
</BODY></HTML>
```


The Objet Navigator

There are no methods associated but some attributes:

```
<html>
<head><title>Version du Navigateur</title></head>
<body>
<h1> Voyons de quel navigateur s'agit il</h1>
<hr>
<script language="javascript">
document.write("La version de ce navigateur est " + navigator.appVersion);
document.write ("<br>le Navigateur est <B>" + navigator.appName + "</B>");
document.write("<br>Le nom de code est " + navigator.appCodeName);
document.write ("<br>La plate-forme cliente est " + navigator.userAgent);
</script>
</body></html>
```

I. JavaScript and the Details



Objectives: Learn how JavaScript stores data, how a document is structured in JavaScript, learn event-based programming with JavaScript.



Content

- Variable identifiers and their types
- The notion of objets
- Arrays
- Control structures
 - Condition and selection
 - Iteration
- Procedures and functions

Les Tableaux

- Variables can contain numbers, strings, and object references. There is also another type of information that JavaScript can manipulate: **Arrays**.

```
var products = new Array("car", "truck", "bike");
```

product[0] → car

product[1] → truck

product[2] → bike

product.length → 3

Simple Example with Arrays

```
<HTML>
<HEAD>
<TITLE>test with arrays</TITLE>
<SCRIPT LANGUAGE="JavaScript">
var coulours=new Array("red","blue","green","white");
</SCRIPT>
</HEAD>
<BODY>
<a href="#" onClick="document.bgColor=coulours[0];return true;">Couleur1</a>
<BR>
<a href="#" onClick="document.bgColor=coulours[1];return true;">Couleur2</a>
<BR>
<a href="#" onClick="document.bgColor=coulours[2];return true;">Couleur3</a>
<BR>
<a href="#" onClick="document.bgColor=coulours[3];return true;">Couleur4</a>
</BODY>
</HTML>
```

Another Test with Arrays

```
<HTML>
<HEAD>
<TITLE>Another test with arrays</TITLE>
<SCRIPT LANGUAGE="JavaScript">
    var processors=new Array("Intel PIII","AMD K7","Cirex");
</SCRIPT>
</HEAD><BODY>
<FORM NAME=formulaire>
<INPUT TYPE=text NAME=typeAchat VALUE=""><BR>
<INPUT TYPE=button VALUE="Intel"
    onClick="document.formulaire.typeAchat.value=processors[0];return true;">
<INPUT TYPE=button VALUE="AMD"
    onClick="document.formulaire.typeAchat.value=processors[1];return true;">
<INPUT TYPE=button VALUE="Cirex"
    onClick="document.formulaire.typeAchat.value=processors[2];return true;">
</FORM>
</BODY></HTML>
```

Random Add

```
<HTML><HEAD>
<TITLE>Test win Arrays</TITLE>
<SCRIPT LANGUAGE="JavaScript">
    var pubs=new Array("car01.jpg","car02.jpg","car03.jpg","car04.jpg",
        "car05.jpg","car06.jpg","car07.jpg");
    var numPub=pubs.length;
    var now = new Date();
    var x = now.getSeconds() % numPub;
</SCRIPT>
</HEAD><BODY>
<H1>Today's Car</H1>
<SCRIPT LANGUAGE="JavaScript">
    document.write("Car Number "+ x+"<br>");
    document.write("<IMG WIDTH=320 HEIGHT=240 SRC="+pubs[x]+">");
</SCRIPT></BODY></HTML>
```

DOM Revised

- Despite the fact that we didn't see all the object details in DOM, we have now a rough idea how it works and how it is used.
- After seeing the arrays, we know that a document is structured as follows:

document



links[]
anchors[]
images[]
area[]
form[]

document.image[2].src="...";

Change the 3rd document image.

I. JavaScript and the Details



Objectives: Learn how JavaScript stores data, how a document is structured in JavaScript, learn event-based programming with JavaScript.



Content

- Variable identifiers and their types
- The notion of objets
- Arrays
- Control structures
 - Condition and selection
 - Iteration
- Procedures and functions

Condition and Selection

- There are many variations for this

if - then - else

Like many other languages, JavaScript provides control structures to execute instructions pending some conditions.

```
if (condition) instruction;
else OtherInstruction;
```

```
if (condition) instruction;
```

```
if (condition) {
    instruction1;
    instruction2;
    ...
}
```

```
if (condition) {
    instruction1;
    instruction2;
    ...
} else {
    instructionA;
    instructionB;
    ...
}
```

Nested Selections

- We can also have many nested conditions

```
if (condition1) {instructions1;}
else if (condition2) {instructions2;}
else if (condition3) {instructions3;}
else if (condition4) {instructions4;}
....
else {otherInstructions;}
```

Logic Operators

- Conjunction:
 - And **&&**
 - example: (price>=200 && member==true)
- Disjunction
 - Or **||**
 - example: (age>26 || total==1000)
- Negation
 - Not **!**
 - example: (!finale && !(nombre==50))

Example with Condition

```
<HTML>
<HEAD><TITLE>Example with Condition</TITLE></HEAD>
<BODY>
<SCRIPT LANGUAGE="JavaScript">
  var month=prompt("What is your favorit colour?");
  if (pays.toUpperCase() == "BLUE")
    alert("Great! Me too.");
  else
    alert("That is ugly!");
</SCRIPT>
</BODY>
</HTML>
```

Iterations

- JavaScript offre une structure de contrôle qui permet d'exécuter une série d'instructions plusieurs fois.
- Cette structure de contrôle est utile pour les opérations répétitives.
- Répéter x fois ou répéter jusqu'à ce qu'une certaine condition est vérifiée.

While Loop

Like many other languages, JavaScript provides control structures repetitions

```
while (condition) instruction;
```

```
while (condition) {
  instruction1;
  instruction2;
  ...
}
```

The execution of the instruction is repeted while the condition is true.

Example with Repetition

```
<HTML>
<HEAD><TITLE>devinette</TITLE>
<SCRIPT LANGUAGE="JavaScript">
  var maintenant = new Date();
  var x = maintenant.getSeconds();
  var reponse=prompt("devinez les secondes");
</SCRIPT></HEAD><BODY>
<SCRIPT LANGUAGE="JavaScript">
  while (reponse != x) {
    document.write( reponse+"<br>");
    if (x<reponse) alert("Trop grand");
    else alert("Trop petit");
    reponse=prompt("devinez les secondes");
  }
  document.write("Bravo!");
</SCRIPT></BODY></HTML>
```

For Loop

```
for (init;condition;increment) instruction;
```

```
for (init;condition;increment) {  
    instruction1;  
    instruction2;  
    ...  
}
```

```
for (i=0;i<20;i++) document.write("*");
```

Example with *for* Loop

```
<html>  
<head><title>Table des Factoriels</title></head>  
<body>  
<h1>Factoriels de 1 a 9</h1>  
<script language = "JavaScript">  
<! -- cache moi  
for (i=1, fact=1; i<10;i++, fact=fact *i){  
    document.write (i + "! = " + fact);  
    document.write ("<br>");  
}  
// fin de cache -->  
</script>  
</body>  
</html>
```

Arrays and DOM

- As seen before, a document could have a set of images. These images could have a name: ``
- The name of an image can be used to manipulate then image: `document.myName.src="car.gif";`
- With DOM, a document has an image array: `document.images[0], document.images[1],...`
- When can then manipulate the images by accessing this array: `document.images[3].src="car.gif";`

Example with images[]

```
<html>  
<head><title>Les images du document</title>  
</head><BODY>  
<IMG SRC=dblace1.jpg><IMG SRC=dblace2.jpg>  
<IMG SRC=dblace3.jpg><IMG SRC=dblace4.jpg>  
<IMG SRC=dblace5.jpg>  
<SCRIPT LANGUAGE="JavaScript">  
var laquelle=100;  
while(laquelle<0 || laquelle>4)  
    laquelle=prompt('Changer quelle image? (0 .. 4)',1);  
window.document.images[laquelle].src="car01.jpg";  
</SCRIPT>  
</BODY>  
</html>
```

I. JavaScript and the Details



Objectives: Learn how JavaScript stores data, how a document is structured in JavaScript, learn event-based programming with JavaScript.



Content


- Variable identifiers and their types
- The notion of objects
- Arrays
- Control structures
 - Condition and selection
 - Iteration
- Procedures and functions

Functions and Procedures

- Functions and procedures, also called subroutines, are fundamental in JavaScript programming.
- A subroutine is a set of instructions semantically linked.
- Grouping instructions in subroutines avoids rewriting the instructions. If there is an update, it suffices to make the change once in the subroutine.

Example showing the use of subroutines with and without parameters

- Suppose we want to measure the reading speed of a user. We could put a button within the text that would display the time each time it is pressed.



The button could be:

<FORM>

```
<INPUT TYPE=button VALUE=time onClick="
  var theDate=new Date();
  var hour=theDate.getHours();
  var minutes=theDate.getMinutes();
  var secondes=theDate.getSeconds();
  var theTime=hour + ':' + minutes + ':' + secondes;
  alert(theTime);">
```

</FORM>

Il y a un Problème

- The previous code could be put in different places within the text.
- Notice that if the minutes or the secondes are less than 10, only one digit is displayed (0,1, 2, 3, ...9) and not two (00, 01, 02,...09).
- Now we have to update the code wherever we incerted it.
- A better solution would be to write a subroutine that displays the time and call this same sub-routine with all the buttons in the text.

Sub-routine without Parameters

```
<SCRIPT LANGUAGE="JavaScript">
<!-- hide me
    function annonceTime() {
        var theDate=new Date();
        var hour=theDate.getHours();
        var minutes=theDate.getMinutes();
        var secondes=theDate.getSeconds();
        var theTime=hour + ':' + minutes + ':' + secondes;
        alert(theTme);
    }
// end hide -->
</SCRIPT>
```

```
<FORM>
<INPUT TYPE=button VALUE=Time
onClick="annonceTime();">
</FORM>
```

Updating the sub-routine

```
function annonceTime() {
    var theDate=new Date();
    var hour=theDate.getHours();
    var minutes=theDate.getMinutes();
    if (minutes<10) minutes="0"+ minutes; ←
    var secondes=theDate.getSeconds();
    if (secondes<10) secondes="0"+ secondes; ←
    var theTime=heure + ':' + minutes + ':' + secondes;
    alert(theTime);
}
```

The change is done once and all buttons are updated.

Sub-routine with parameters

```
if (minutes<10) minutes="0"+ minutes; ←
if (secondes<10) secondes="0"+ secondes; ←
```

Similar operations → we could create a new function to do this same operation.

Fonctions avec Paramètres et Valeur de Retour (suite)

```
function correct(theNumber) {  
    var myValue;  
    if (theNumber<10) myValue="0"+theNumber;  
    else myValue=theNumber;  
    return myValue;  
}
```

arguments

Returned value

The updated sub-routine

```
function annonceTime() {  
    var theDate=new Date();  
    var hour=theDate.getHours();  
    var minutes=theDate.getMinutes();  
    var corrMin = correct(minutes);  
    var secondes=theDate.getSeconds();  
    var corrSec = correct(secondes);  
    var theTime=hour + ':' + corrMin + ':' + corrSec;  
    alert(theTime);  
}
```

Object Creation

- Functions are also used to define and create new objects.

```
function house(roomn, year, gar){  
    this.rooms = roomn;  
    this.year = year;  
    this.aGarage = gar;  
}  
var myHouse = new house(8, 1990, true)
```

rooms
year
aGarage

Objet - Arraya

- Each object is made of an array of values and properties.

- Thus, we could write:

```
myHouse[0] = 8;  
myHouse[1] = 1990;  
myHouse[2] = true;
```


Index by Property

- An array is indexed by an integer (0 to N).
- An array representing an object is also indexed by object attribute.
- Thus, we could write:

```
myHouse["rooms"] = 8;  
myHouse["year"] = 1990;  
myHouse["aGarage"] = true;
```

Dynamic Extension of Objects

- We can dynamically add attributes to an.

```
yourHouse = new house(5, 1974, true);  
yourHouse.closeOcean = "false";  
yourHouse.windows = 18;
```

rooms
year
aGarage
closeOcean
windows

yourHouse

- The extension concerns only the instance to which the attributes were added. The other instances stay the same.

Attaching a method to an Object

- Like Object Oriented languages, JavaScript allows you to attach methods to objects that you create.

```
function house(roomn, year, gar){  
  this.rooms = roomn;  
  this.year = year;  
  this.aGarage = gar;  
  this.display = displayHouse;  
}
```

Calling the Method

```
function displayHouse(){  
  document.write("House has " + this.rooms);  
  if (this.aGarage)  
    document.write(" and a garage.");  
  document.write("Built in " + this.year);  
}
```

```
myHouse=new house(8,1990,true);  
myHouse.display();
```

Summary Part I



- We saw the basics of JavaScript and we learned to write scripts and perhaps interpret scripts written by others.
- We explored the concept of object with JavaScript and covered some predefined objects such as String, Date, Math, Window, etc., as well as their properties and methods.
- We discussed the document object model (DOM).
- We saw how to create new objects and extend their properties and methods.

II Event-Based Programming with JavaScript



Objectives: Learn how JavaScript is event driven and how user actions are tracked.



Contenu

- **What is an event?**
- What are the recognized events?
- Capturing events.

Interactive Application

- For an interactive application one needs the possibility to react to users actions.
- We need to provide the user with means to enter data, click on objects, select options, etc.
- The application needs to capture the users' actions and react to these actions.
- → Identify evenents and answer them.

What is an Event?

- An event is a change in the environment due to some actions usually (but not always) made by the user.
- These actions are pertaining to the mouse and keyboard.
- A change in the document or the objects in the document constitute events.
- Example: moving or clicking the mouse, updating a value in an entry field, etc.

II Event-Based Programming with JavaScript



Objectives: Learn how JavaScript is event driven and how user actions are tracked.



Contenu

- What is an event?
- What are the recognized events?
- Capturing events.

What are the events recognised by JavaScript?

- Mouse click (left button).
- Mouse cursor passing over an object.
- The selection or de-selection of an entry field.
- The update of the entry field value.
- The submission of an entry form.
- The loading of a new document.
- The exit of the browser or document.

Events in JavaScript

- We already saw a sample of JavaScript events in the code examples used to illustrate previous concepts.
- JavaScript captures and manages 9 event types:

- | | |
|---------------|---|
| • onClick | the left button of the mouse is clicked when over a target. |
| • onMouseOver | The mouse cursor passes over a target. |
| • onBlur | The focus on a target is lost. |
| • onFocus | The target is activated. |
| • onSelect | The target is selected. |
| • onChange | The target content changed. |
| • onSubmit | The form is submitted (or being submitted). |
| • onLoad | The page is being loaded. |
| • onUnload | The page is being replaced or closed. |

The Event Targets

The targets actually capture the events; these are objects from the document object model (DOM). Objects don't capture the same events.

- | | |
|---------------|--|
| • onClick | A HREF, BUTTON, CHECKBOX, RADIO, RESET, SUBMIT |
| • onMouseOver | A HREF |
| • onBlur | PASSWORD, SELECT, TEXT, TEXTAREA |
| • onFocus | PASSWORD, SELECT, TEXT, TEXTAREA |
| • onSelect | PASSWORD, TEXT, TEXTAREA |
| • onChange | PASSWORD, SELECT, TEXT, TEXTAREA |
| • onSubmit | FORM |
| • onLoad | BODY (window), IMAGE |
| • onUnload | BODY (window) |

Other Events

- `onError`
- `onAbort`
- These events are used with window and image and come from page or image loading interruptions (manual interruption, abort, etc.).

How does it work?

- The browser intercepts the events (also called interruptions) and acts upon them.
- Action → Event → Capture → Action
- The actions are associated to the targets by means of the HTML tags.
- `<TAG onEvent="Action">`
- Example: ``

Another Event: Timeout

- The window object has 2 specific methods to manage a countdown
- *setTimeout()* specifies a millisecond counter that is associated to an instruction. After a specified time interval, an interruption is produced and the instruction is evaluated.
- *clearTimeout()* cancels the countdown.

Une Horloge Vivante

- We saw how to display the current time in a previous example.
- To have a clock, it suffices to continuously display the time at the same place.
- We have to call the function to display the time at regular intervals.
- Defining a timeout within the time display function would do the trick.

Example of a Timer

```
<html><head><title>Timer</title>
<SCRIPT LANGUAGE="JavaScript">
function horloge () {
    var maintenant = new Date();
    var heures = maintenant.getHours();
    var minutes = maintenant.getMinutes();
    var secondes = maintenant.getSeconds();
    var resultat = "" + heures+ ((minutes < 10)?"0":":")
    + minutes + ((secondes < 10)?"0":":") + secondes;
    return resultat;
}
function quelleHeure() {
    var heure=horloge();
    document.forms[0].temps.value=heure;
    setTimeout('quelleHeure()',1000);
}
</SCRIPT></head>
```

```
<BODY onLoad="quelleHeure()">
<FORM>
<INPUT TYPE=TEXT SIZE=8
        NAME=temps>
</FORM>
</BODY></html>
```

Slides with setTimeout()

Continuously superposing images by calling the subroutine that displays an image at regular intervals.

```
<html>
<head><title>Countdown images</title>
<SCRIPT LANGUAGE="JavaScript">
var slides=new Array("jump1","jump2","jump3","jump4",
                    "jump5","jump6","jump7","jump8");
var number=slides.length;
var num=0;
var timer=0;
```

Slidess (con't)

```
function forward() {
    stop();
    num = (num+1) % number;
    window.document.images[0].src=slides[num] + ".jpg";
    window.document.forms[0].image.value=num+1;
}

function backward() {
    stop();
    if (num==0) num=number-1; else num--;
    document.images[0].src=slides[num] + ".jpg";
    window.document.forms[0].image.value=num+1;
}
```

Slidess (con't)

```
function next() {
    forward();
    timer=setTimeout("next()",500);
}

function stop() {
    clearTimeout(timer);
}

function restart() {
    timer=setTimeout("next()",500);
}
```

Slides (con't)

```
</SCRIPT>
</head>
<BODY>
<CENTER>
<IMG SRC=jump1.jpg>
<FORM>
<INPUT TYPE=BUTTON value=&lt;&lt; onClick='backward();'>
<INPUT TYPE=BUTTON value=Stop onClick='stop();'>
<INPUT TYPE=BUTTON value=&gt;&gt; onClick='forward();'>
<INPUT TYPE=BUTTON value=Show onClick='restart();'>
Image:<INPUT TYPE=TEXT SIZE=1 NAME=image>
</FORM>
</CENTER>
</BODY>
</html>
```

II Event-Based Programming with JavaScript



Objectives: Learn how JavaScript is event driven and how user actions are tracked.



Contenu

- What is an event?
- What are the recognized events?
- Capturing events.

Order of Execution

- In traditional programming, the order of execution is dictated by the order of instructions in the code. The execution is instruction by instruction.
- With event-based programming, the order of execution depends upon the events.
- When an event is intercepted, the corresponding instructions are executed.

Order of Execution (con't)

- Functions should be defined before they are invoked.
- **Warning:** An event could happen before the whole document is loaded. The user can indeed use the mouse while only part of the page is loaded and displayed.
- Before invoking a function we must make sure it is defined.
- This is one reason why it is better to put the function definitions in <HEAD>

Associating Functions with Events

- After defining a function, one must associate this function to the events we want to capture.
- We use the keywords for these events (event handlers) that we saw previously.

```
<BODY onLoad="JavaScript instructions">  
<FRAMESET onLoad="JavaScript instructions">  
window.onLoad=FonctionReference;
```

Example of Association

- A form `<FORM METHOD=...>...</FORM>` allows data entry. The browser submits these data to the server when the submit button is pressed.
- Adding `onSubmit="return verifyForm(this)"` to the tag `<FORM>` would call and execute the function `verifyForm` when the browser attempts to submit the data, and thus allows to intercept the data and validate it before it is actually sent.

Events for JavaScript Objects

- We saw the list of events intercepted by JavaScript.
- Let's see, object by object, the most common events and the HTML syntax.
- We will emphasise the events associated with form objects.

Common Events and *window*

- `onLoad` invoked when the page is loaded.
- `onUnload` invoked when the page is left.
- HTML Syntax
 - `<BODY`
 - `[BACKGROUND= "imageURL"] [BGCOLOR = "color"]`
 - `[TEXT = "color"] [LINK = "color"] [ALINK = "color"] [VLINK = "color"]`
 - `[onLoad = "handler"] [onUnload = "handler"]>`
 - `<FRAMESET`
 - `[ROWS="lines"] [COLS="columns"]`
 - `[onLoad="handler"] [onUnload="handler"]>`

Common Events and *link*

- `onClick` invoked when a hyperlink is clicked.
- `onMouseOver` invoked when the mouse is over the link.
- HTML Syntax

```
<A  
  HREF = "URL"  
  [TARGET = "target_window"]  
  [onClick = "handler"]  
  [onMouseOver = "handler"] >
```

Common Events and *form*

- `onReset` invoked before resetting.
- `onSubmit` invoked before submitting.
- HTML Syntax

```
<FORM  
  [NAME = "name"]  
  [TARGET = "target_window"]  
  [ACTION = "URL"]  
  [METHOD = GET/POST]  
  [ENCTYPE = "encryption"]  
  [onReset = "handler"]  
  [onSubmit = "handler"] >
```

Common Events and *button*

- `onClick` invoked when the button is pressed.
- HTML Syntax

```
<INPUT  
  TYPE = button  
  VALUE= "string"  
  [NAME = "name"]  
  [onClick = "handler"] >
```

Attributes

name
form
type
value

Common Events and *checkbox*

- `onClick` invoked when the checkbox is clicked.
- HTML Syntax

```
<INPUT  
  TYPE = checkbox  
  [VALUE= "string"]  
  [NAME = "name"]  
  [CHECKED]  
  [onClick = "handler"] >
```

Attributes

name
form
checked
defaultChecked
type
value

Common Events and *radio button*

- `onClick` invoked when the radio button is clicked.

- HTML Syntax

- `<INPUT`

- `TYPE = radio`
 - `[VALUE= "string"]`
 - `[NAME = "name"]`
 - `[CHECKED]`
 - `[onClick = "handler"]` >

- Attributes

- name
 - form
 - checked
 - defaultChecked
 - type
 - value

Common Events and *select*

- `onChange` invoked when a change occurs.
- `onBlur` invoked when the select loses focus.
- `onFocus` invoked when the select is activated.

- HTML Syntax

- `<SELECT`

- `NAME = "name"`
 - `[SIZE= size]`
 - `[MULTIPLE]`
 - `[onChange = "handler"]`
 - `[onBlur = "handler"]`
 - `[onFocus = "handler"]` >

- Attributes

- name
 - form
 - length
 - options
 - selectedIndex
 - type

Common Events and *text*

- `onChange` invoked when there is a change
- `onBlur` invoked when the text loses focus
- `onFocus` invoked when the text field is activated.

- HTML Syntax

- `<INPUT`

- `TYPE=text`
 - `[NAME = "name"]`
 - `[VALUE= "default"]`
 - `[SIZE=size] [MAXLENGTH=maxsize]`
 - `[onChange = "handler"]`
 - `[onBlur = "handler"]`
 - `[onFocus = "handler"]` >

- Attributes

- name
 - form
 - value
 - defaultValue
 - type

Common Events and *textarea*

- `onChange` invoked when there is a change.
- `onBlur` invoked when the area loses focus.
- `onFocus` invoked when the area is activated

- HTML Syntax

- `<TEXTAREA`

- `[NAME = "name"]`
 - `[ROWS= "lines"] [COLUMNS="columns"]`
 - `[WRAP=OFF/VIRTUAL/PHYSICAL]`
 - `[onChange = "handler"]`
 - `[onBlur = "handler"]`
 - `[onFocus = "handler"]` >

- Attributes

- name
 - form
 - value
 - defaultValue
 - type

Common Events and *submit*

- `onClick` invoked the button is clicked.

- HTML Syntax

- `<INPUT`

- `TYPE = submit`
 - `[VALUE= "string"]`
 - `[NAME = "name"]`
 - `[onClick = "handler"]` >

- Attributes

- name
 - form
 - type
 - value

Common Events and *reset*

- `onClick` invoked the button is clicked.

- HTML Syntax

- `<INPUT`

- `TYPE = reset`
 - `[VALUE= "string"]`
 - `[NAME = "name"]`
 - `[onClick = "handler"]` >

- Attributes

- name
 - form
 - type
 - value

Common Events and *image*

- `onClick` invoked when the image is clicked.

- HTML Syntax

- `<INPUT`

- `TYPE = image`
 - `SRC= "URL"`
 - `[NAME = "name"]`
 - `[onClick = "handler"]` >

- Attributes

- name
 - form
 - type
 - src

Entering an e-mail Address

```
<html>
<head><title>Valider e-mail</title>
<SCRIPT LANGUAGE="JavaScript">
```

```
...
```

```
</script>
<BODY onLoad="aZero();">
<FORM name="monAdresse" onSubmit="return verifierEmail();">
E-Mail: <input type="text" name="email" size="25"
onchange="this.value=checkemail();"><br>
<input type="submit" value="Soumet" name="B1">
<input type="reset" value="Init" name="B2" onclick="aZero();">
</FORM>
</BODY>
</html>
```

e-mail Validation

```
function checkemail(){
  var ladresse=document.monAdresse.email.value;
  var nouvelle = "";
  for (k = 0; k < ladresse.length; k++){
    ch = ladresse.substring(k, k+1);
    if ((ch >= "A" && ch <= "Z") || (ch >= "a" && ch <= "z") || (ch == "@") ||
      (ch == "[" || (ch == "]" || (ch == "." || (ch == "_" || (ch == "-" ||
      (ch >= "0" && ch <= "9"))
      nouvelle += ch;
    }
  }
  if (ladresse!= nouvelle) {
    if (confirm("Vous avez entre des espaces ou des caracteres non valides.\n\n
    Cliquez OK pour fixer ceci.\n\nCliquez CANCEL pour garder inchange."))
      return nouvelle;
    return ladresse;
  }
  return ladresse;
}
```

e-mail Validation (con't)

```
function verifierEmail(){
  var ladresse = document.monAdresse.email.value
  if (document.monAdresse.email.value == "") {
    alert("Entrez votre e-mail S.V.P.")
    document.monAdresse.email.focus();
    return false;
  }
  ladresse=document.monAdresse.email.value;
  b = ladresse.substring(0,1)
  if (b == '@') {
    alert("Verifiez votre e-mail. Il doit y a voir un prefix avant '@'\n\n
    Exemple: jha@alibaba.tn")
    document.monAdresse.email.select();
    document.monAdresse.email.focus();
    return false;
  }
}
```

e-mail Validation (con't)

```
if ((ladresse.indexOf("@") == -1) || (ladresse.indexOf(".") == -1)) {
  alert("Verifiez votre e-mail. Une adresse doit inclure les signes '@' et '.'\n\n
  Exemple: jha@alibaba.tn");
  document.monAdresse.email.select();
  document.monAdresse.email.focus();
  return false;
}
c = ladresse.indexOf("@")
d = ladresse.indexOf(".");
e = ladresse.substring(c,d);
if (e.length < 2) {
  alert("Vous devez introduire quelque chose entre les signes '@' et '.'");
  document.monAdresse.email.select();
  document.monAdresse.email.focus();
  return false;
}
```

e-mail Validation (con't)

```
b = ladresse.indexOf(".")
ladresse= ladresse.substring(b,ladresse.length);
if (ladresse.length <2) {
  alert("Vous devez introduire au moins un caractere apres le signe '.'");
  document.monAdresse.email.select();
  document.monAdresse.email.focus();
  return false;
}
alert("Merci");
return false;
}

function aZero(){
  document.monAdress.email.value = "";
  document.monAdress.email.focus();
}
```

Summary Part II



- We saw what is an event in JavaScript.
- We saw how events are intercepted.
- We enumerated the known events.
- We saw the form elements and the associated events.
- We saw how to program with events and how the execution is done.
- We illustrated the concepts with simple examples.

III. Practical Examples



Objectives: See and analyse some concrete examples with JavaScript.




Contenu

- Data entry validation within a form;
- Image animation in web pages;
- Use of cookies to store client information;
- A electronic cart in an e-commerce site.

Some useful References

- JavaScript with Netscape
<http://developer.netscape.com/docs/manuals/index.html?content=javascript.html>
- Jscript (Microsoft) <http://msdn.microsoft.com/scripting/default.htm>
- Builder.com <http://www.builder.com>
- Designing with JavaScript <http://www.webcoder.com/>
- Ask the JavaScript Pro http://www.inquiry.com/techtips/js_pro/
- WebMonkey <http://hotwired.lycos.com/webmonkey/programming/javascript/>
- Yahoo
http://dir.yahoo.com/Computers_and_Internet/Programming_Languages/JavaScript/

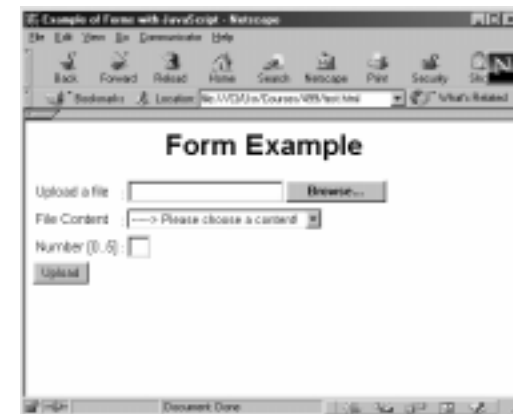

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.0 Transitional//EN">
```

```
<HTML>
```

```
<HEAD>
```

```
<title>Example of Forms with JavaScript</title>
```

```

<SCRIPT TYPE="text/javascript" LANGUAGE="JavaScript">
function checkform()
{
    if(document.myform.variable1.value=="") {
        alert("Please enter the full path for your file! ");
        document.myform.variable1.focus();
        return(false);
    }
    if(document.myform.variable2.selectedIndex==0) {
        alert("Please choose a content! ");
        document.myform.variable2.focus();
        return(false);
    }
    if(document.myform.variable3.value>5){
        alert("Please enter a correct number! ");
        document.myform.variable3.focus();
        return(false);
    }
}
</SCRIPT>

```

```

</HEAD>
<BODY bgcolor="#ffffff">
<center>
    <h1><font face="arial,helvetica"> Form Example</font></h1>
</center>
<FORM name="myform"
    action="/cgi-bin/mycgi.pl"
    method="post"
    enctype="multipart/form-data"
    onSubmit="return checkform()">
<table border="0">
<tr>
    <td><font face="arial,helvetica"> Upload a file</font></td>
    <td>: <input type="file" name="variable1" size=20 > </td>
</tr>

```

```

<tr>
    <td><font face="arial,helvetica"> File Content</font></td>
    <td>: <select name="variable2">
        <option value="">-----> Please choose a content!
        <option value="1"> Resume
        <option value="2"> Application
        <option value="3"> Complaint
        <option value="4"> Other
    </select></td>
</tr>
<tr>
    <td><font face="arial,helvetica"> Number [0..5]</font></td>
    <td>: <input type="text" name="variable3" size=2 > </td>
</tr>
</table>
<input type=submit value="Upload">
</FORM>
</BODY>
</HTML>

```